



EZ GEAR WINCH

sales@doleco-usa.com


1-203-440-1940

Product introduction:


This patented, innovative gear drive winch has a 22:1 gear ration which produces extreme high efficiency. It's Compact design, labor-saving operation make it suitable for all kinds of environments.

Operational Considerations:

- Make sure the straps are intact before using.
- Regularly inspect straps, if necessary, replace when out of service
- Do not exceed the maximum load capacity
- Use winch handle to loosen or tighten the strap. Use of other tools may damage and shorten the service life and will void the warranty.

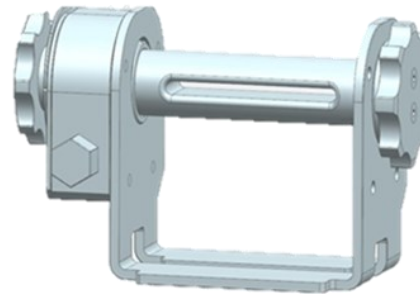

PN 28120054 Double L Slider

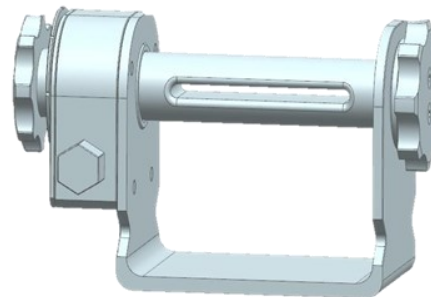

PN 28120054 C-Channel Slider



PN 28200010 Winch Handle

Product Information:

Working load limit 6,600 lbs.3,000kgs

Weight: 13.45 lbs. 6.1 kgs.

Suitable for all kinds of environments

Recommended grease - Showa Shell

Alvania RA-J Grease, from -40 C degree to 130 C

degree. Option - Valvoline Full Synthetic Moly Fortified Grease

Operating Instructions:

- Turn the big handwheel to tighten the straps
- Pull the Small handwheel and rotate to the locking position.
- Using the winch handle , tighten the strap (Tension force less than 2.5 tons)
- Use the Winch Handle to release the tension on the strap.
- Pull the Small Handwheel and rotate to the release position (Small handwheel extends out of gear body)

